


Title: **MAXIMUM PERMISSIBLE SIDELOADS FOR KINETROL ACTUATOR SHAFTS**

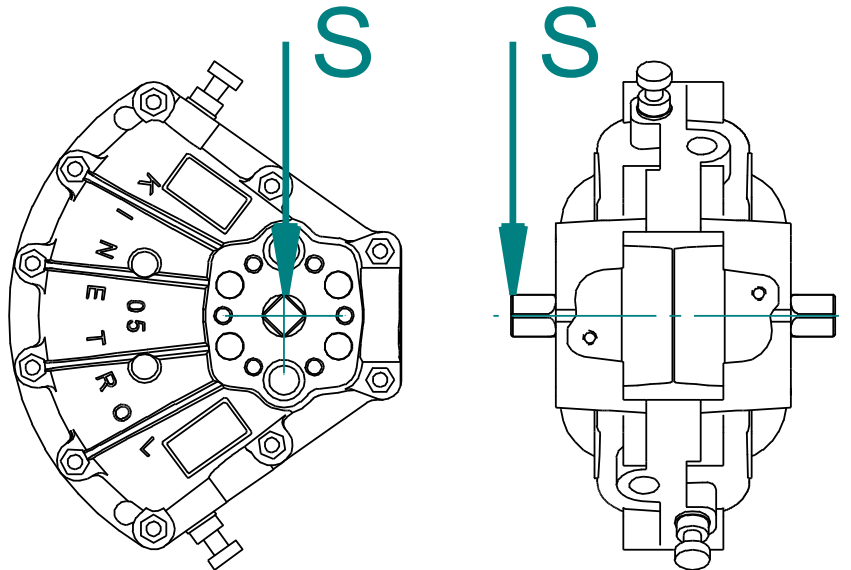

Sideloading S must not act at a point beyond end of square.

ACTUATOR MODEL	MAXIMUM S		
	N	lbf	kg
OMO	23	5	2,2
01	127	28	13
02	250	55	25
03	400	90	40
05	450	100	45
07	1000	220	100
08 (Pre 2010)	800	180	80
08 (2010)	1660	373	169
09	1600	360	160
10*	2300	515	235
12	2600	580	260
14	4100	920	410
15	4600	1030	468
16	5900	1300	590
18	15000	3300	1500
20/30	25000	5623	2548
60	41000	9213	4179

These sideloads apply to the full size drive output end of shafts, not the accessory drive ends. \*Sideload for model 10 applies to both full size male and female drive ends.