


Kinetrol VLS Limit Switch Box Ordering Codes

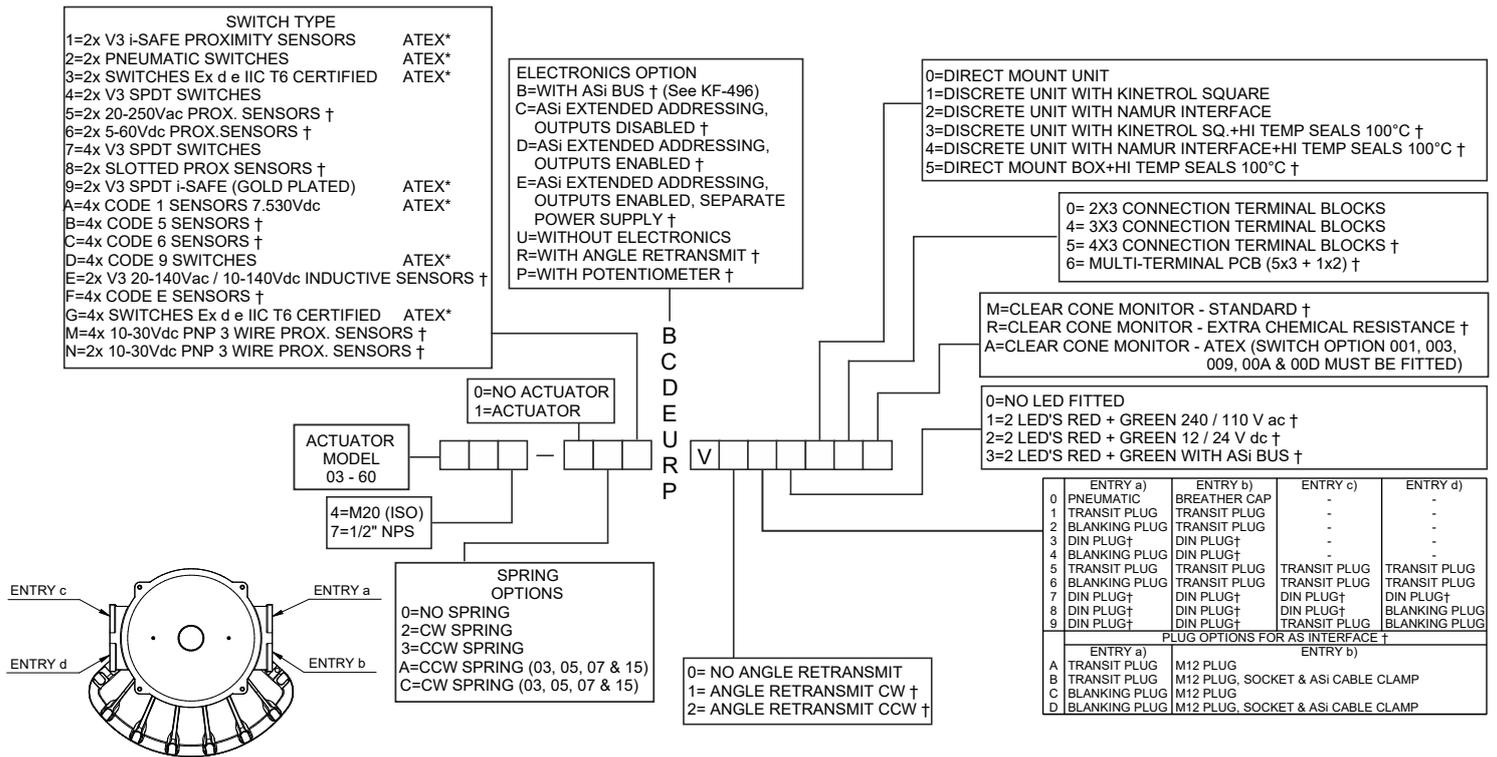

† NOT AVAILABLE ON ATEX VERSIONS
* MUST HAVE ATEX MONITOR FITTED


Examples

- 074-001UV01000A 07 VLS box with 2x V3 i-safe proximity sensors, 2 transit plugs, 2x 3 way terminals ATEX clear cone monitor, ATEX approved.
- 074-004UV01000 07 VLS box with 2x V3 SPDT switches, 2 transit plugs, 2x 3 way terminals.
- 074-004RV12000 07 VLS box with 2x V3 SPDT switches, angle retransmit clockwise, 1x transit & 1x blanking plug. 2x 3 way terminals,
- 094-124BV02000 09 Spring return clockwise actuator & VLS box with 2x V3 SPDT switches, standard ASi, 2x transit plugs, 2x 3 way terminals.
- 094-109UV01000A 09 Double acting actuator & VLS box with 2x V3 i-safe mechanical switches gold plated, 2 transit plugs, 2x 3 way terminals, ATEX clear cone monitor, ATEX approved.

Further switch options are available upon request - please contact Kinetrol for details

For high temperature option suitable for 250°C / 482°F for a maximum of 2 hours exposure - Contact Kinetrol for special order codes.

Kinetrol XLS Limit Switch Box Ordering Codes

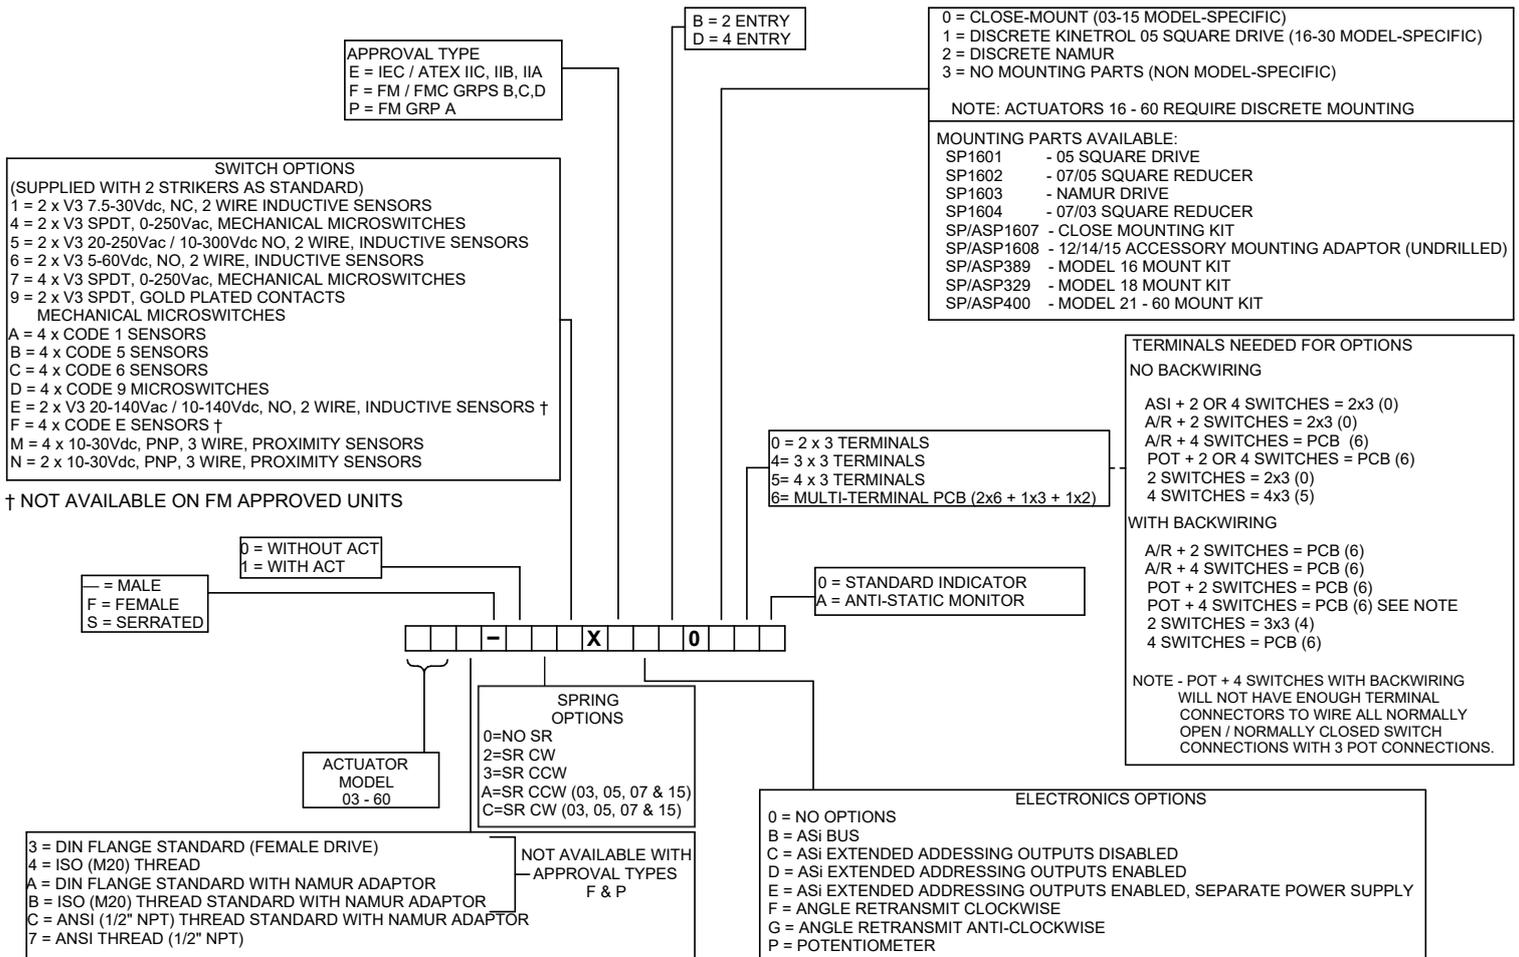

Electronics Option B - E *

AS interface options are available with both the two and four entry Kinetrol Explosion Proof Switch Box. Options B to E allow for different extended addressing options. Ambient temperature environment type GAS or DUST -20°C to +80°C (-4°F to 176°F)

* For more details on the Kinetrol AS interface card see Kinetrol Asi Interface Bus Communication data sheet.

Electronics Option F - G

Two or four entry Switch Box fitted with angle retransmit circuit powered by 14-30v DC supply, the 2 wire loop powered circuit generates a 4-20mA current to feedback position. Ambient temperature environment type GAS -40°C to +80°C (-40°F to 176°F) DUST -20°C to +80°C (-4°F to 176°F)

Electronics Option P

Two or four way Switch Box fitted with potentiometer (20K ohms conductive plastic type).


Examples

004-004XE0B034A Kinetrol discrete explosion proof limit switch box with 2 x V3 Microswitches
 3 x 3 terminals and hazardous area monitor, Atex approved - no mounting parts

077-006XF0B0300 Kinetrol Ansi 07 explosion proof limit switch box with 2 x v3 5-60v dc inductive sensors, 3 x 3 terminals, standard indicator, FM Approved

124-104XE0D050A Kinetrol model 12 double acting actuator complete with 2 x V3 Microswitches
 4 x 3 terminals and hazardous area monitor, Atex approved

Kinetrol Stainless Steel VLS Limit Switch Box Ordering Codes

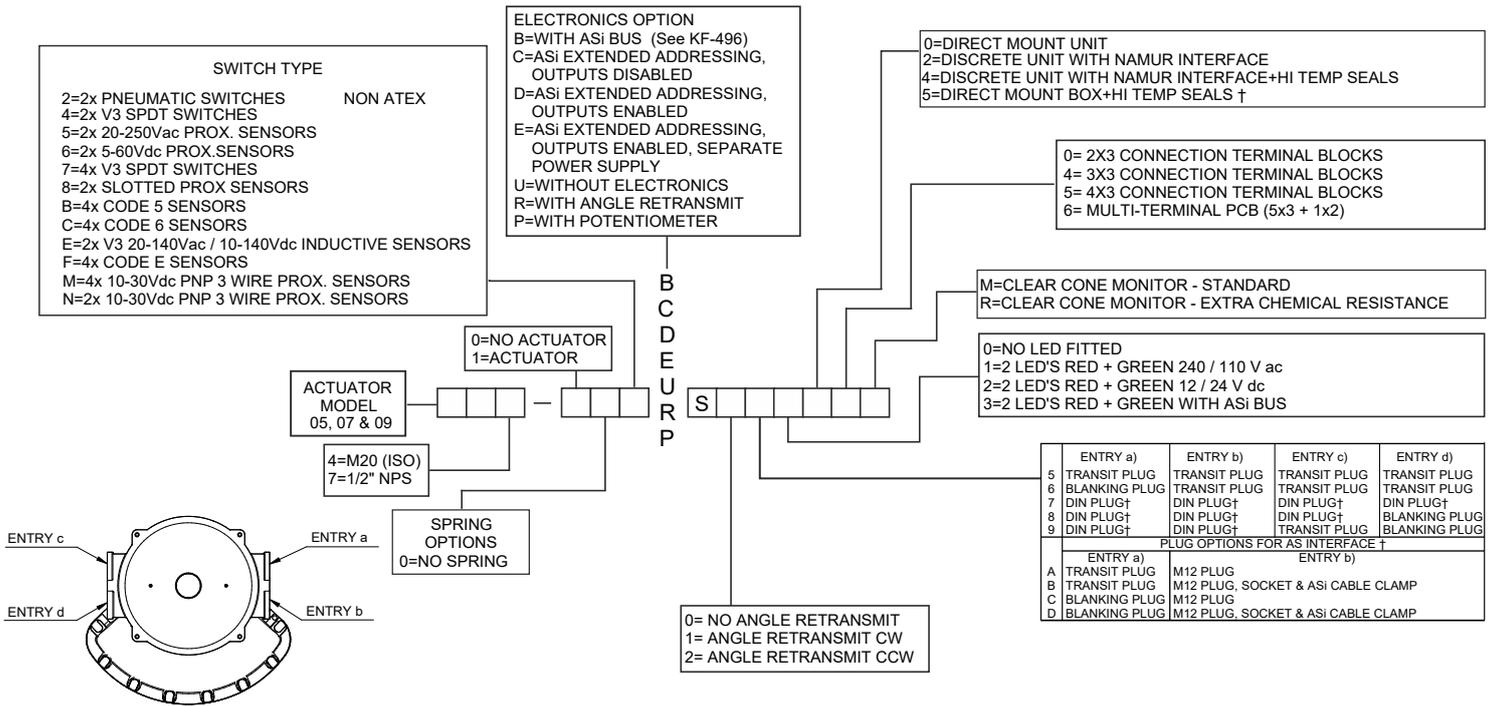

NOT AVAILABLE IN ATEX VERSIONS

Examples

074-004US05000M Kinetrol Stainless Steel VLS Limit Switch Box with 2 x V3 Microswitches. 3 x 3 terminals, 4 x M20 Cable Entries with transit plugs and Clear Cone Monitor.

094-106US05004 Kinetrol Model 09 Stainless Steel Double Acting Actuator complete with Stainless Steel VLS Limit Switch Box containing 2 x 5-60v dc Proximity Sensors, 4 x 3 terminals and 4 x M20 Cable Entries with transit plugs