


# Kinetrol VLS/ULS Limit Switch Box Ordering Codes

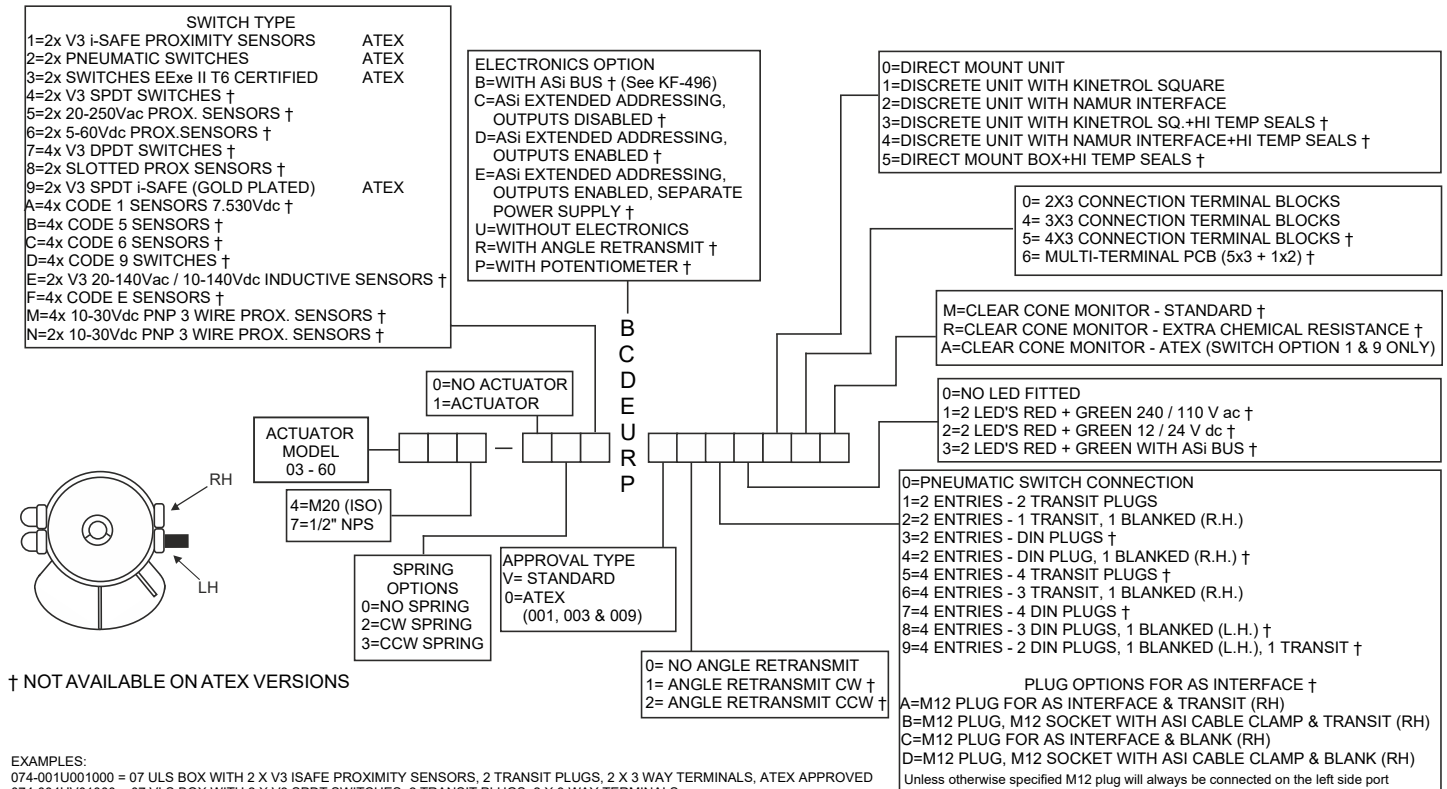

**EXAMPLES:**  
 074-001U001000 = 07 ULS BOX WITH 2 X V3 ISAFE PROXIMITY SENSORS, 2 TRANSIT PLUGS, 2 X 3 WAY TERMINALS, ATEX APPROVED  
 074-004UV01000 = 07 VLS BOX WITH 2 X V3 SPDT SWITCHES, 2 TRANSIT PLUGS, 2 X 3 WAY TERMINALS  
 074-004RV12000 = 07 VLS BOX WITH 2 X V3 SPDT SWITCHES, ANGLE RETRANSMIT CLOCKWISE, 1 X TRANSIT & 1 BLANKING PLUG, 2 X 3 WAY TERMINALS  
 094-124BV02000 = 09 SPRING RETURN CLOCKWISE ACTUATOR & VLS BOX WITH 2 X V3 SPDT SWITCHES, STANDARD ASI, 2 TRANSIT PLUGS, 2 X 3 WAY TERMINALS  
 094-109U001000 = 09 DOUBLE ACTING ACTUATOR, ULS BOX WITH 2 X V3 ISAFE MECH. SWITCHES GOLD PLATED, 2 TRANSIT PLUGS, 2 X 3 WAY TERMINALS, ATEX APPROVED


Further switch options are available upon request -contact Kinetrol for details

## Examples

- 074-001U001000 07 ULS box with 2x V3 i-safe proximity sensors, 2 transit plugs, 2x 3 way terminals ATEX approved.
- 074-004UV01000 07 VLS box with 2x V3 SPDT switches, 2 transit plugs, 2x 3 way terminals.
- 074-004RV12000 07 VLS box with 2x V3 SPDT switches, angle retransmit clockwise, 1x transit & 1x blanking plug. 2x 3 way terminals,
- 094-124BV02000 09 Spring return clockwise actuator & VLS box with 2x V3 SPDT switches, standard ASI, 2x transit plugs, 2x 3 way terminals.
- 094-109U001000 09 Double acting actuator & ULS box with 2x V3 i-safe mechanical switches gold plated, 2 transit plugs, 2x 3 way terminals, ATEX approved.

Further switch options are available upon request - please contact Kinetrol for details

# Kinetrol XLS Limit Switch Box Ordering Codes

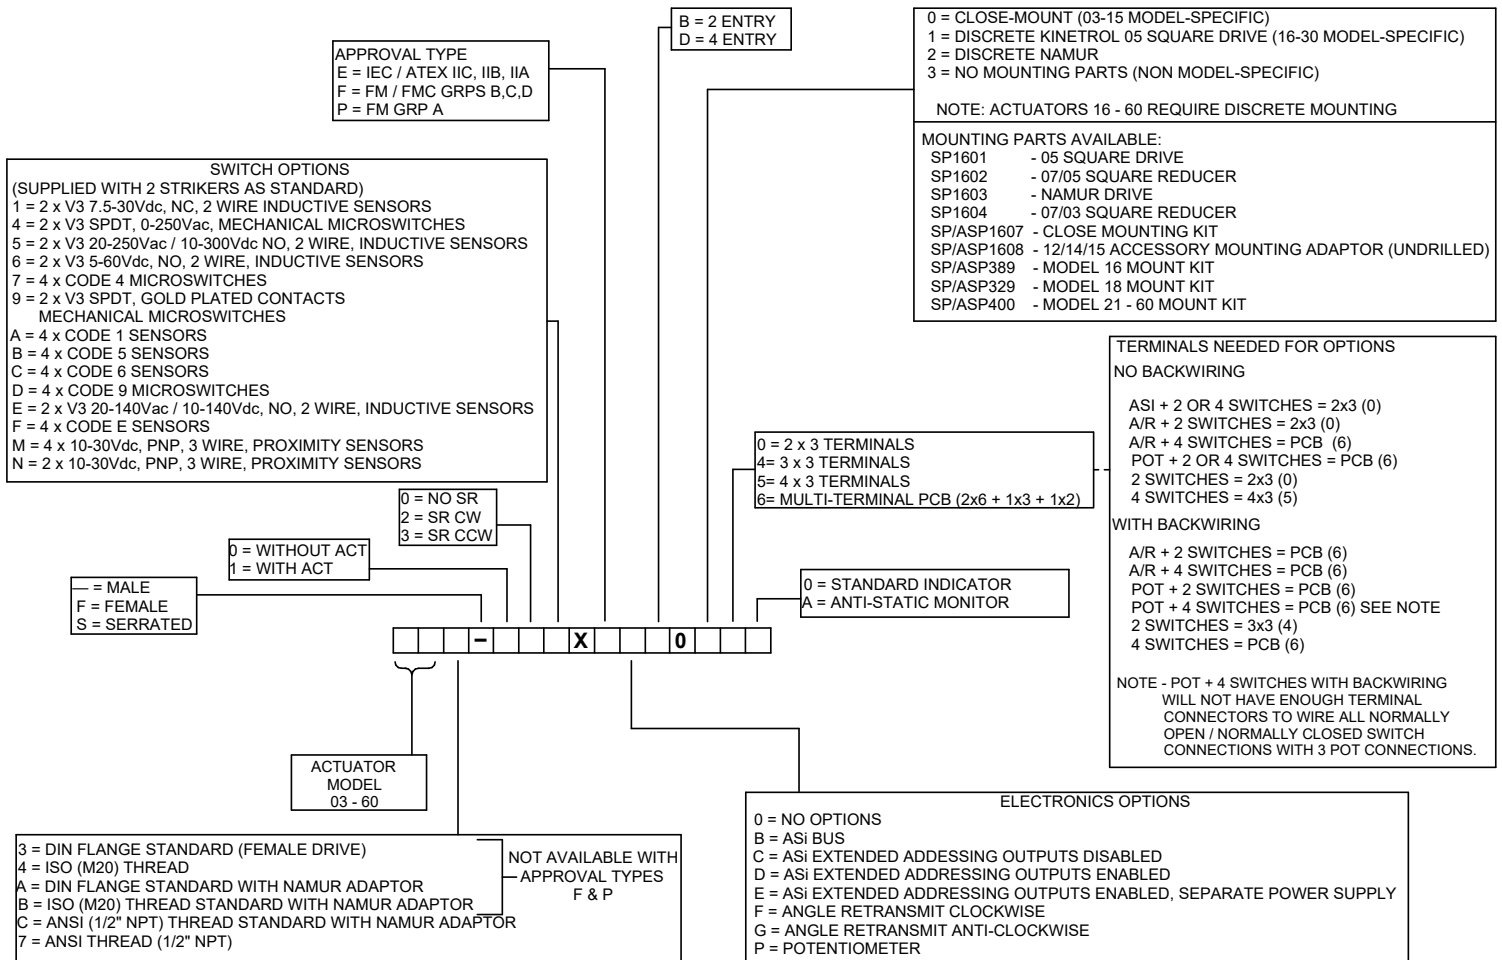

AS interface options are available with both the two and four entry Kinetrol Explosion Proof Switch Box. Options B to E allow for different extended addressing options.

## Electronics Option F - G \*

Two or four entry Switch Box fitted with angle retransmit circuit powered by 14-30v DC supply, the 2 wire loop powered circuit generates a 4-20mA current to feedback position.

## Electronics Option P \*

Two or four way Switch Box fitted with potentiometer (20K ohms conductive plastic type).

\* For more details on the Kinetrol AS interface card see Kinetrol Asi Interface Bus Communication data sheet.

## Examples

004-004XE0B034A Kinetrol discrete explosion proof limit switch box with 2 x V3 Microswitches  
3 x 3 terminals and hazardous area monitor, Atex approved - no mounting parts

077-006XF0B0300 Kinetrol Ansi 07 explosion proof limit switch box with 2 x v3 5-60v dc inductive  
sensors, 3 x 3 terminals, standard indicator, FM Approved

124-104XE0D050A Kinetrol model 12 double acting actuator complete with 2 x V3 Microswitches  
4 x 3 terminals and hazardous area monitor, Atex approved